

## NATURE-SL12-80U

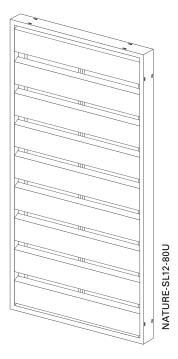



Surface Solid wood slat, planed

Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly

Type of wood Siberian larch

Colours available on request


and in accordance with order placement once a sample has been produced and approved

Pretreatment Untreated;

Glazed slats on request

Notes A support profile is required for widths greater than 801 mm

The considerable weight must be taken into consideration when preparing assembly

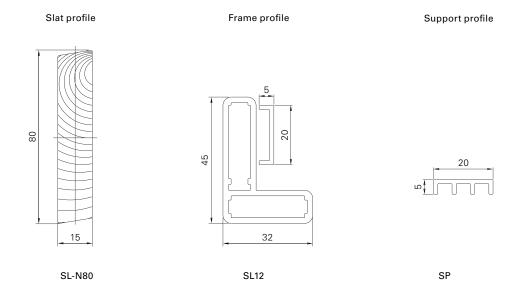

Min./Max. dimensions Width: 550 to 1600 mm

Height: 800 to 3000 mm

Min./Max. infeed Approx. 90,0–100,0 mm

Weight Approx. 15 kg/m²

Frame profile  $45 \times 32$  mm extruded aluminium hollow chamber profile

Slat profile  $80 \times 15 \text{ mm}$  solid wood slat

Slat carrier profile  $20 \times 5$  mm extruded aluminium profile

 $\textbf{Support profile} \hspace{1cm} 20 \times 5 \hspace{1cm} \text{mm extruded aluminium hollow chamber profile}$ 

Corner connections Glued-in aluminium bracket with visible notch in the outer frame

Options Electric drive