



EMS

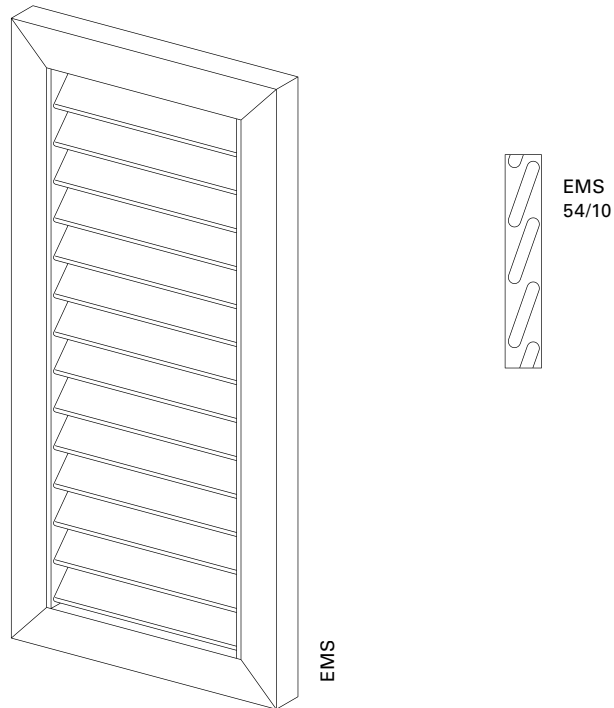


Surface	Fine structure matt (standard), silk gloss, matt Powder-coated 200 °C before assembly
Colours	RAL Classic, RAL Design, NCS, VSR
Notes	Drain holes at bottom of frame Slats are exchangeable Finish not possible

Slat profile



EMS

Frame profile

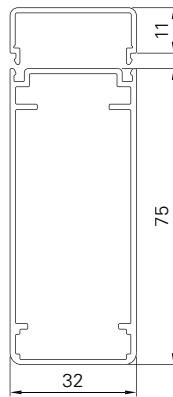

R75

Min./Max. dimensions	Width: 280 to 800 mm Height: 800 to 2500 mm
Min./max. infeed	46,0–51,5 mm
Inclination angle	15°
Weight	Approx. 5 kg/m ²
Frame profile	75 × 32 mm extruded aluminium hollow chamber profile
Slat profile	54 × 10 mm extruded aluminium hollow chamber profile
Slat carrier profile	32 × 11 mm extruded aluminium profile
Stop bead	Supplied loose, black or white rubber (depending on sash colour)
Corner connections	Aluminium bracket, glued-in and additionally secured by plastic pins
Options	Electric drive Rabbet bead Inside opener crank Basic frame Horizontal cross-panel Pre-installation Catch Frames